

## MHP-2550A150A

### [General Specification]


Item		Description
Part Number		MHP-2550A150A
Material of Container		Aluminium 1050
Wick Structure		Groove
Working Fluid		Acetone
Dimension	Thickness	2.5 mm
	Width	50.0 mm
	Length	150.0 mm
Weight		26.0 g (Average)
Qmax	Horizontal	75.0 W (at 50°C)
	Vertical	270.0 W (at 50°C)
Typical Thermal Resistance		<0.2°C / W (Average)
Operating Inclination, $\phi$		0 ~ 90°
Leak Temperature Criterion		-40~100°C

### [Scope]

This specification details the requirements and applications for 2.5 mm x 50.0mm x 150.0mm.

### [Dimensions]

The dimensional attributes of this shall conform to the following figure.

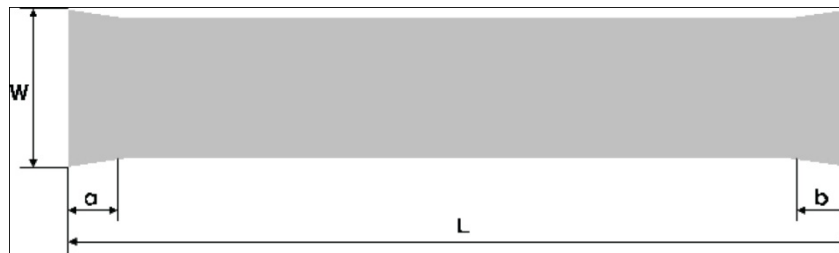

Thickness (t)	Width (W)	Length (L)	Ineffective Length (a)	Ineffective Length (b)
2.5 mm	50.0 mm	150.0 mm	2.5 mm	2.5 mm

### [Material]

Container	Aluminium 1050
Working Fluid	Acetone
Surface Treatment	None


### AMEC Thermasol

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP


Telephone: +44(0) 1493 668622 Fax: +44(0) 1493 668623

Email: [sales@amecthermasol.co.uk](mailto:sales@amecthermasol.co.uk) Website: [www.amecthermasol.co.uk](http://www.amecthermasol.co.uk)

**Test Data - MHP-2550A150A**

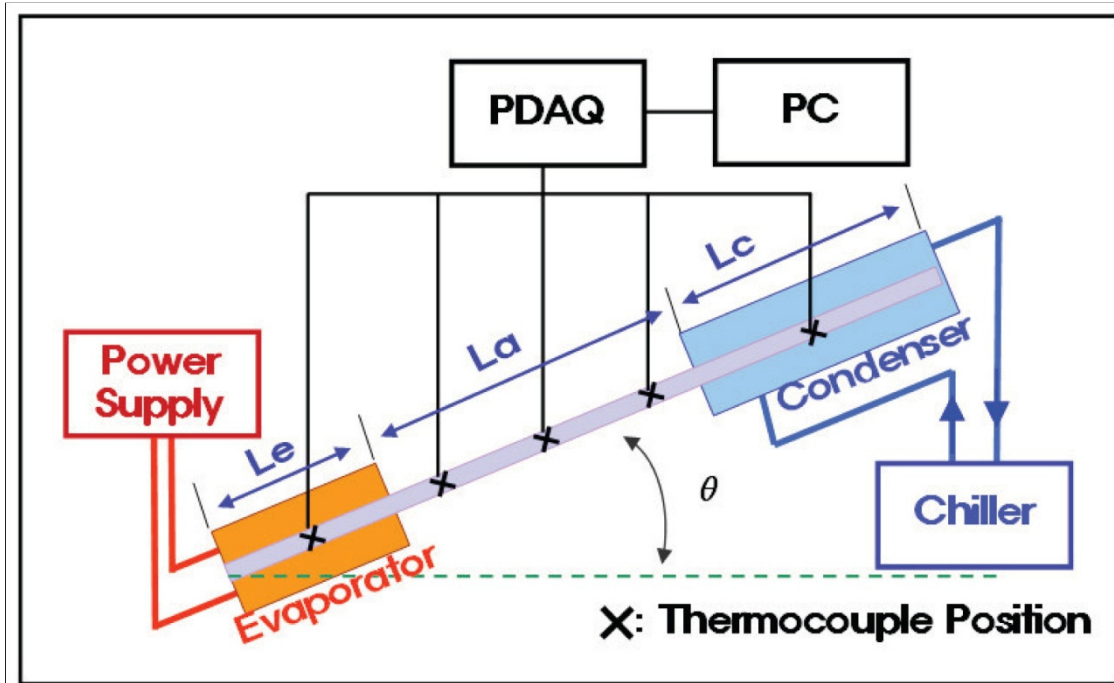

*Qmax Test Apparatus*

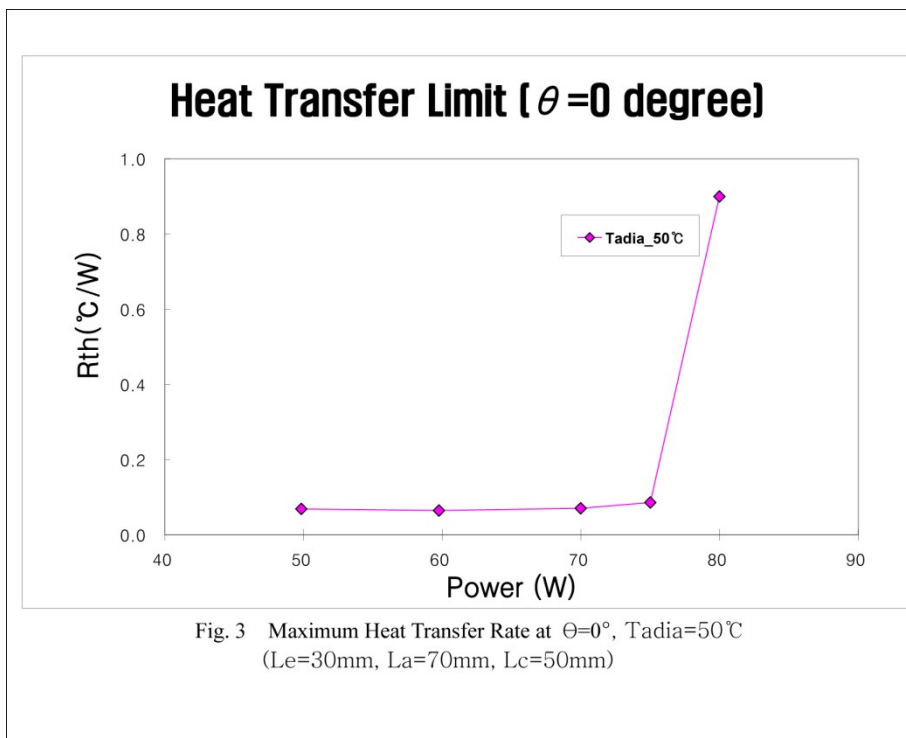

**AMEC Thermasol**

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP

Telephone: +44(0) 1493 668622 Fax: +44(0) 1493 668623

Email: [sales@amecthermasol.co.uk](mailto:sales@amecthermasol.co.uk) Website: [www.amecthermasol.co.uk](http://www.amecthermasol.co.uk)

**Test Data - MHP-2550A150A**

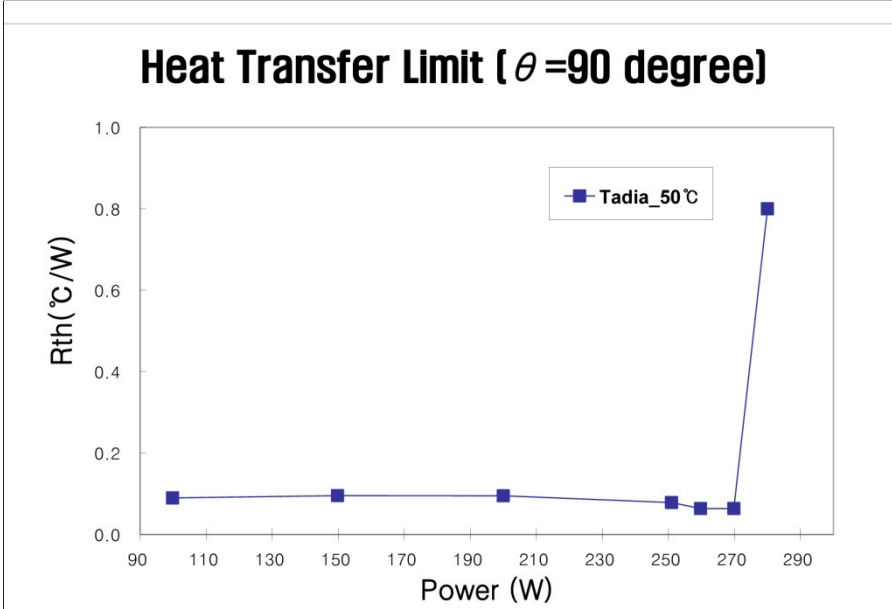


Fig. 4 Maximum Heat Transfer Rate at  $\theta=90^\circ$ , Tadia=50°C  
 (Le=30mm, La=70mm, Lc=50mm)

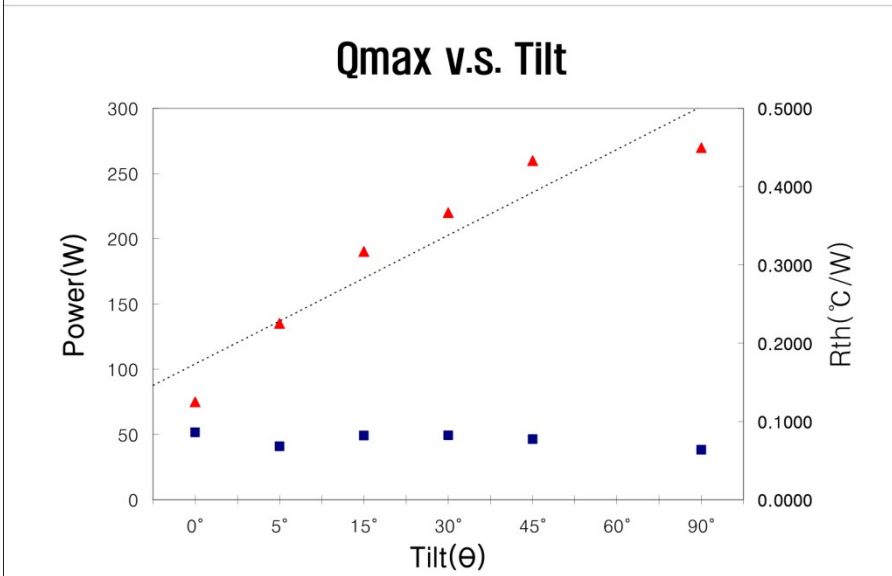


Fig. 5 Maximum Heat Transfer Rate vs. Inclination at Tadia=50°C  
 (Le=30mm, La=70mm, Lc=50mm)

**AMEC Thermasol**

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP

Telephone: +44(0) 1493 668622 Fax: +44(0) 1493 668623

Email: [sales@amecthermasol.co.uk](mailto:sales@amecthermasol.co.uk) Website: [www.amecthermasol.co.uk](http://www.amecthermasol.co.uk)

## Test Data - MHP-2550A150A

### [High Temperature Leak Test]

Every manufactured S sealed with a mechanical pinch system. The mechanical pinch of container results in a cold weld seal. The average leak temperature is about 170°C.

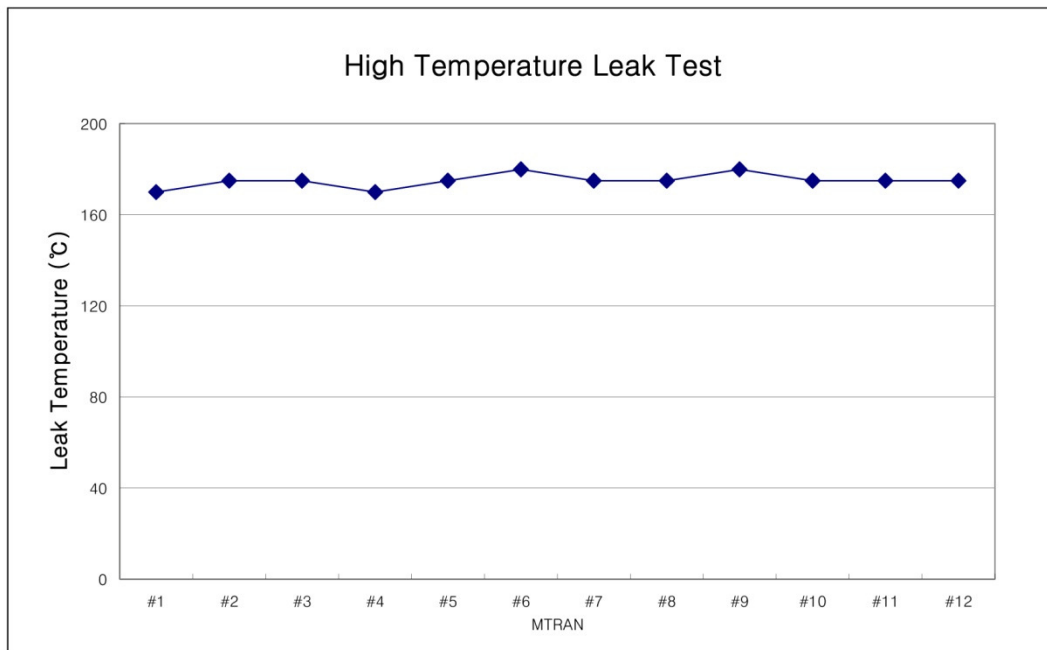


Fig. 6 Leak Test at High Temperature

### AMEC Thermasol

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP

Telephone: +44(0) 1493 668622 Fax: +44(0) 1493 668623

Email: [sales@amecthermasol.co.uk](mailto:sales@amecthermasol.co.uk) Website: [www.amecthermasol.co.uk](http://www.amecthermasol.co.uk)

## Test Data - MHP-2550A150A

### [Thermal Response Test]

Every manufactured must pass the thermal response test to ensure its operation and Vacuum and leakage check. The experimental test bench is schematically shown in Fig.6. Water bath temperature,  $T_w$  is set at 50°C and the temperature of other end,  $T_t$  is measured immediately after it is placed vertically into the water bath. The criterion for acceptance is 5°C ( $T_w - T_t$ ).

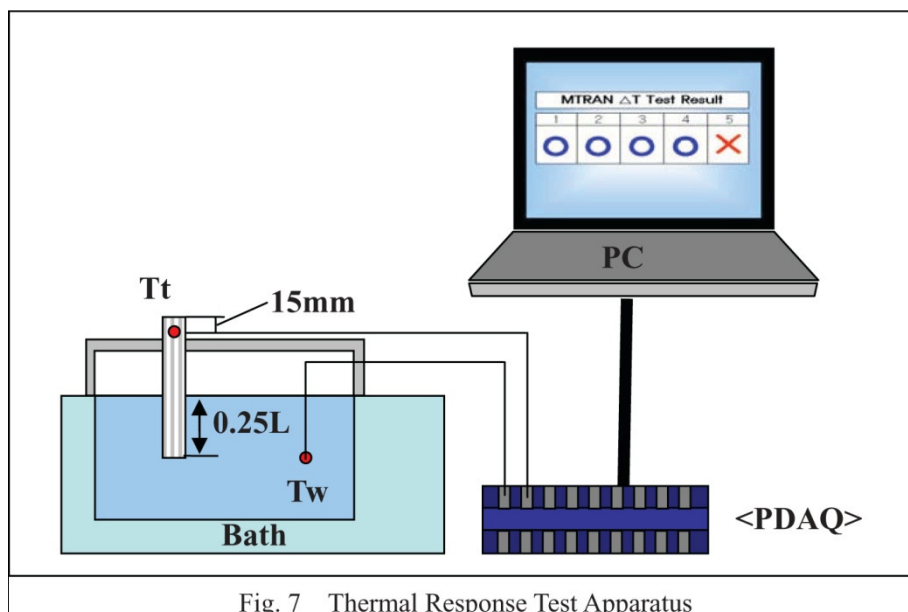


Fig. 7 Thermal Response Test Apparatus

### AMEC Thermasol

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP

Telephone: +44(0) 1493 668622 Fax: +44(0) 1493 668623

Email: [sales@amecthermasol.co.uk](mailto:sales@amecthermasol.co.uk) Website: [www.amecthermasol.co.uk](http://www.amecthermasol.co.uk)